


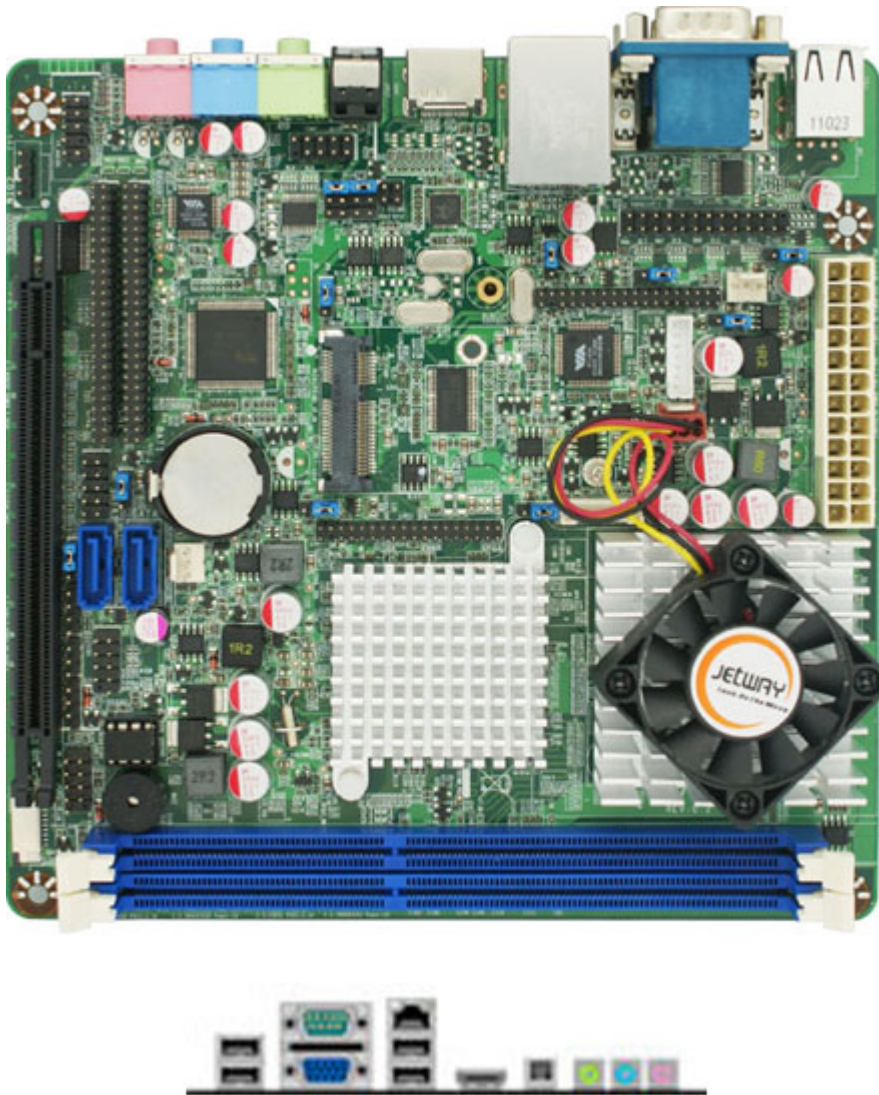

134.00 EUR  
incl. 19% VAT, plus [shipping](#)

- VIA VX900H Chipset
- Support VIA Nano L2007 (65nm,FSB 800MHz,1.6GHz) processor
- Integrated Chrome9 HD DX9 Engine
- Integrated LVDS support 24-bit TFT LCD
- Support 1 x PCIe x 16 slot (x 8 card)
- Support Serial ATA 2 Devices
- 1 \* Gigabit LAN
- Support DC Fan
- VIA VT1705 HD Audio Codec with 6-Channel
- 170 x 170mm Mini-ITX Form Factor
- Support Watch dog Technology
- **CPU**
  - Support VIA Nano L2007 (65nm, 1.6GHz)processor
  - Front Side Bus 800MHz
- **Chipset**
  - VIA VX900H Chipsets
  - VIA Chrome9 HD DX9 3D engines ( Share System Memory: 64/128/256/512MB)
- **Memory**
  - 2 \* 240-pin DIMM Sockets for un-buffered DDR3 1066MHz SDRAM up to 8GB
- **Expansion Slots**
  - 1 \* PCIe x 16 slot (x 8 card)
- **Power Management**
  - ACPI S3/S4 Compliant ,supports VIA PowerSaver™ feature

- **Storage**
  - **Audio**
  - **Ethernet LAN**
  - **USB**
  - **LVDS**
  - **Rear Panel I / O**
  - **Internal I / O**
  - **BIOS**
  - **Form Factor**
  - **Packing**
  - **Certificate**
  - **Functional**
  - **Temperature**
- 2 \* Serial ATA2 3Gb/s connectors with RAID 0,1 function
  - 1 \* Mini PCI-E
  - VIA VT1705 HD Audio Code with 6-Channel
  - 1 \* RTL8111E 10 / 100 / 1000 PCI-E LAN
  - Embedded 7 \* USB 2.0/1.1
  - Each of onboard 24-bit Dual & Single channel LVDS connector
  - 
  - 4 \* USB 2.0/1.1 ports
  - 1 \* RJ-45 port & 1 \* SPDIF out
  - 3 \* Audio I/O ports ( Line-in, Mic and Line-out )
  - 1 \* VGA port
  - 1 \* DB-9 RS232 COM port
  - 1 \* HDMI Connector
  - 1 \* CPU Smart Fan Connector, 2 \* Sys/Chassis Fan Connectors
  - 2 \* USB 2.0/1.1 headers for 3 USB ports
  - 1 \* 9-Pin COM Port header (RS232/422/485)
  - 1 \* 24 bit Dual Channel & 1 \* 24 bit Single Channel LVDS header
  - 1 \* Parallel header
  - 1 \* GPIO header
  - 1 \* 24-pin ATX power connector
  - AMI 8MB DIP-SPI Flash ROM
  - Mini-ITX Embedded Motherboard(170mmx170mm)
  - Color Box Dimension ■200(W) x 200(D) x 70(H)mm
  - 20 PCS in Cases Gross Weight ■15.4KGS
  - 20 PCS Net Weight ■10.3KGS
  - 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm
  - CE,FCC,RoHS
  - ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
  - Operating within 0~60 centigrade
  - Storage within -20-85 centigrade

**Product Accessories**

- COM cable
- Manual
- CD
- 1x SATA cable
- I/O shield