


159.00 EUR
incl. 19% VAT, plus [shipping](#)

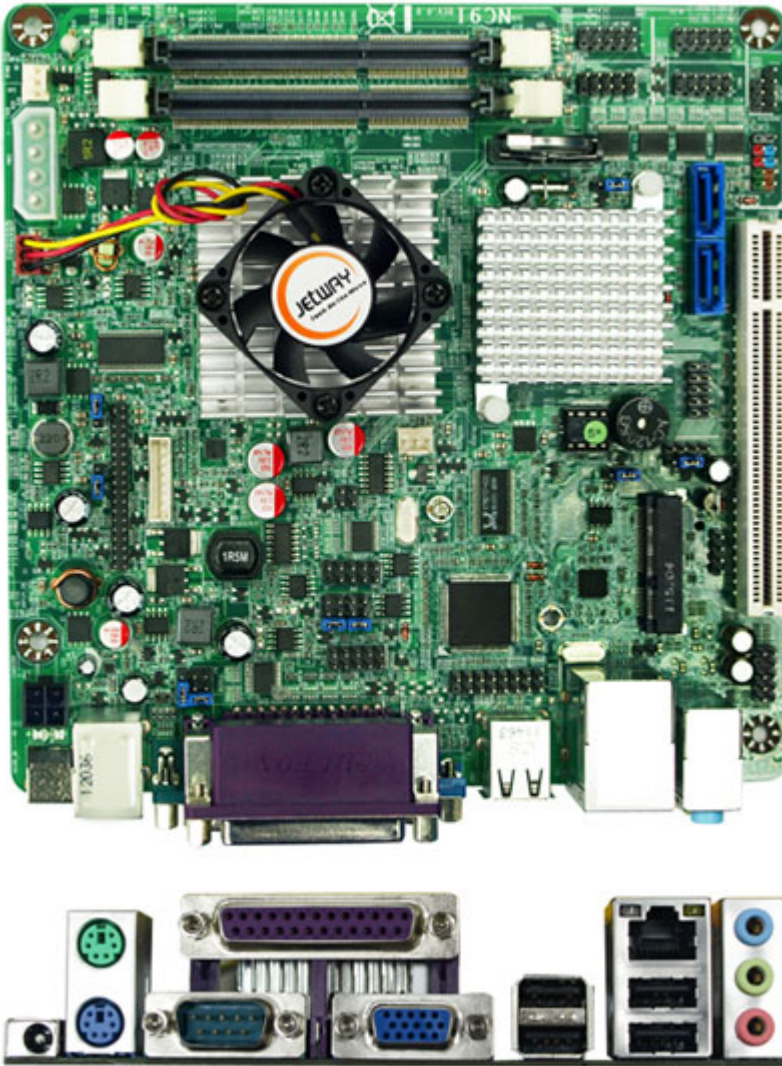

Support: [Specifications](#)

- Intel Atom D525 + NM10 Chipset
- Support INTEL® Atom Dual-Core D525 CPU
- Support 2 * 3Gb/s SATA■
- Support 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
- Supports 1 * Gigabit LAN
- Support 6 * COM ports (COM2 for RS232/422/485)
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- Support Watchdog Technology
- Support CPU Smart FAN
- Mini-ITX Form Factor(170mm x 170mm)

| | |
|------------------------|--|
| CPU | • INTEL ® Atom Dual-Core Processor D525 (45nm,1.80GHZ,1024MB L2 Cache) |
| Chipset | • INTEL® Atom D525 + NM10 |
| Memory | • 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB |
| Expansion Slots | • 1 * PCI slot, 1 * Mini PCI-E socket |
| Storage | • 2 * Serial ATA2 3Gb/s connectors |
| Audio | • Realtek ALC662 6-Channel HD Audio CODEC |
| Ethernet LAN | • 1 * Realtek RTL8111EVL Gigabit LAN |
| LVDS | • Onboard 24-bit single channel LVDS connector |
| USB | • Embedded 7 * USB 2.0/1.1 |

| | |
|-----------------------|--|
| Rear Panel I/O | <ul style="list-style-type: none"> • 4 * USB 2.0/1.1 ports • 1 * PS/2 Mouse & Keyboard connector • 1 * RJ-45 port • 3 * Audio I/O ports (Line-in, Mic and Line-out) • 1 * VGA port • 1 * COM port • 1 * Parallel port • 1 * 12V DC-in jack |
| Internal I/O | <ul style="list-style-type: none"> • 3 USB 2.0 ports • 3 * NB / Chassis Fan connectors; • 1 * 24-pin ATX Power connector • 1 * LVDS header/ 1* CD IN /1 * GPIO • 1 * AUDIO header • 5 * COM headers (COM2 for RS232/RS422/RS485) |
| BIOS | • AMI 8MB DIP Flash ROM |
| Functional | • ATM, KIOSK, POS Machine, Digital Signage, General Application |
| Packing | • Color Box Dimension ■200(W) x 200(D) x 70(H)mm |
| Certificate | • CE, FCC, RoHS |
| Temperature | <ul style="list-style-type: none"> • Operating within 0~40 centigrade • Storage within -20-85 centigrade |
| Form Factor | • Mini ITX Form Factor(17cmx17cm) |