


279.00 EUR  
incl. 19% VAT, plus [shipping](#)

- Quad-Channel !

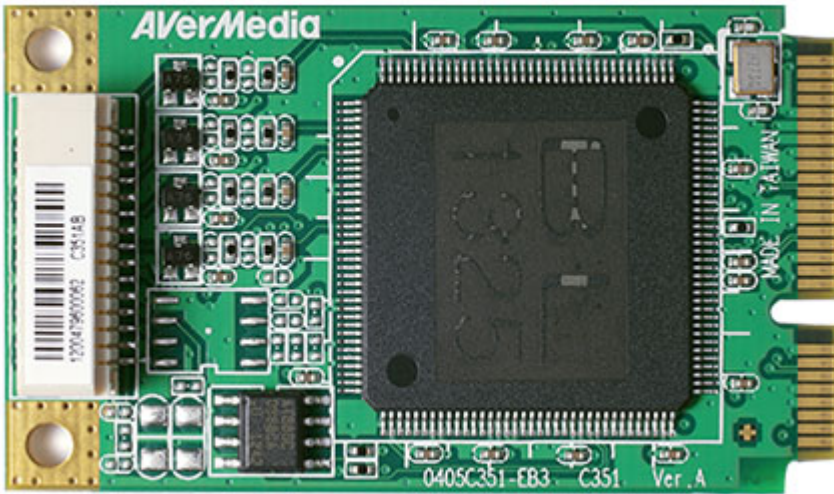

**Support:**  [Datasheet](#)

The DarkCrystal SD Capture Mini-PCIe Quad is capable of preserving up to four channels simultaneously from multiple input sources. The exclusive hardware design of the DarkCrystal SD Capture Mini-PCIe Quad guarantees a fast response and solid performance for high-density SD capture or encoding demands. Saving you cost and a valuable slot on your PC.

The exclusive hardware design of the DarkCrystal SD Capture Mini-PCIe Quad guarantees a fast response and solid performance for high-density SD capture and encoding demands. All while saving a valuable slot on your PC.

- Video capture with composite input
- 4-channel concurrent capture solution
- Standard minicard dimension
- Mainstream programming languages supported
- DirectShow compatible

|                       |  |
|-----------------------|--|
| Module Type           | PCI Express Minicard   |
| Input                 | 4-ch Composite<br>Audio(L/R)   |
| Video Resolution      | NTSC (29.97Hz): 720 x 480, 640 x 480, 360 x 240, 320 x 240, 180 x 120, 160 x 120<br>PAL (25Hz): 720 x 576, 640 x 480, 360 x 288, 180 x 144 |
| Color Adjustment      | Brightness, Contrast, Hue (NTSC only), Saturation  |
| Operating Environment | Temperature: 0 to +55 ■<br>Humidity: 0 to 90% RHNC   |
| Storage Environment   | Temperature: -30 to +65 ■<br>Humidity: 0 to 90% RHNC   |
| Power Requirement     | 1.2W   |
| Dimensions (L x W)    | 50.95 x 30mm   |

**System Requirements**

|            |  |
|------------|--|
| CPU        | Intel® Pentium®4 3.0 GHz<br>AMD Athlon™ 64 3200+ |
| Memory     | 512 MB RAM                                       |
| VGA        | VGA card with support for DirectX9.0c or above   |
| Sound Card | Yes  |

Supported OS

Windows 7/8.1/10 (32/64 bits), Linux (32/64 bits)\*